


# Round Reeves Lock

Snap-Lock Pipe



## Technical Data

- Galvanized Steel (ASTM A653 and A924)
- Standard product is supplied in 26 GA, G-60 coating (ASTM A653 and ASTM A90)
- Available in Specialty Metals:
  - Aluminum (ASTM B209 Alloy 3003 Temper H14)
  - 304 Stainless Steel (ASTM A480 2B Finish)
- Pressure Rating: -1 w.g. to +2 w.g.
- SPR - Reeves Lock Pipe meets SMACNA RL-6A&B
- Dimensional Tolerance:  $\pm 1/4"$

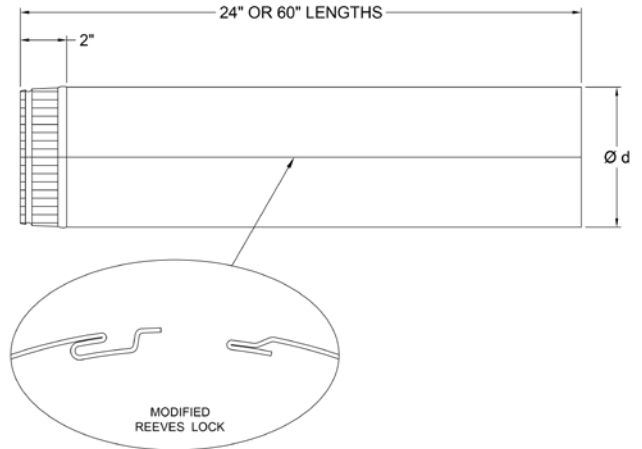

## Product Availability

Size (Ød)	24" Lengths		60" Lengths			
	24 (R)*	Quantity	24 (R)*	Quantity		
		Bundle	Skid/Rack	Bundle	Skid/Rack	
16"	Yes	10	60	Yes	5	25
18"	Yes	10	50	Yes	5	20
20"	Yes	10	50	Yes	5	20
22"	‡	‡	‡	‡	‡	‡
24"	‡	‡	‡	‡	‡	‡

\* (R) - Reeves Lock unsealed pipe ONLY (GreenSeam® is not available over 14").

‡ Consult factory for availability.

## Part Number Schematic

Example: **60SPR16GA24\*\*** = 60" long, 16" round Reeves Lock Snap Pipe in 24Ga. Galvanized Steel

60	SP	R	16	GA	24
Pipe Length 24 - 2' 0" 60 - 5' 0" 48 - 4' 0" AL, S4 Only	Snap Pipe	Lock Type R - Reeves	Pipe Diameter (Ød)	Material GA-Galvanized AL - Aluminum S4 - 304 S.S	Gauge GA: 24 AL: 25 S4: 26

\*\* Add 90 for G90 Galvanized Coating

Check with your sales representative for availability of any size, gauge, or specialty metal item not shown here.